




DWCZ Drywall-to-Timber Screw

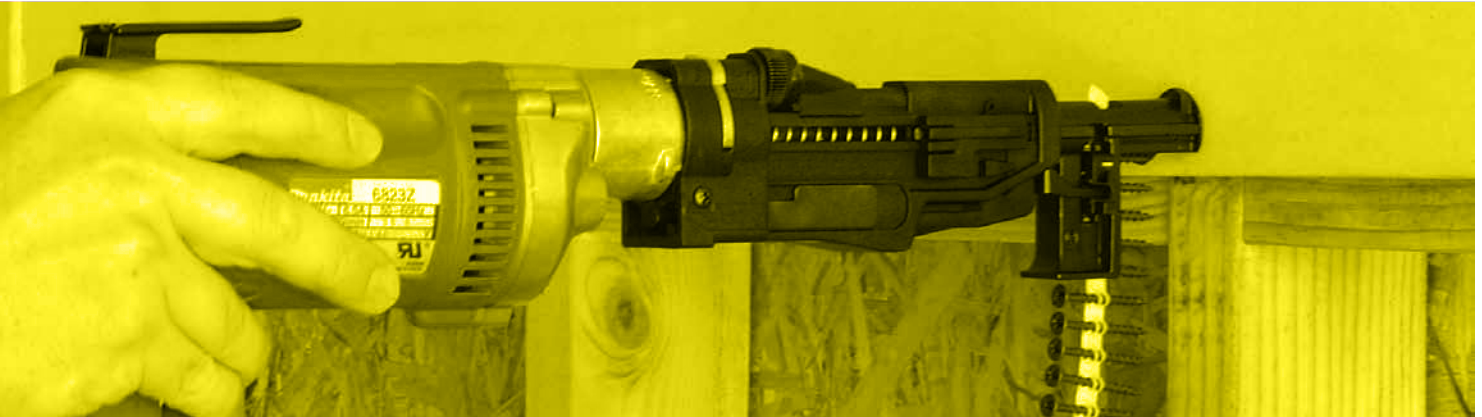

The DWCZ screws design is ideal for drywall to timber applications with a bugle head to cleanly pull down the drywall to the timber and a sharp point for easy starts.

Features

- Bugle head
- #2 Phillips — BIT2P
- Coarse thread
- Sharp point

Application

- Drywall-to-timber
- Maximum recommended board thickness:
32 mm screw — 16 mm; 42 mm screw — 45 mm

Finish

- Yellow Zinc

Corrosion Resistance Level
LOW



Bugle head for countersink finish in drywall



Coarse thread ideal for drywall to timber applications

6 Gauge Drywall-to-Timber Screw

Bit(s) included with every box of screws

Model No.	Diameter	Length	Thread	Point	Box Qty	Drive Size	Replacement Bit	PRO 200	PRO 250	PRO 300
DWCZ114PSA	3.5mm	32mm	Coarse Threads	Sharp	2500	#2 Phillips	BIT2P-RC10	✓	—	—
DWCZ158PSA		42mm								