




## Strong-Drive® TB TIMBER-TO-STEEL Screw

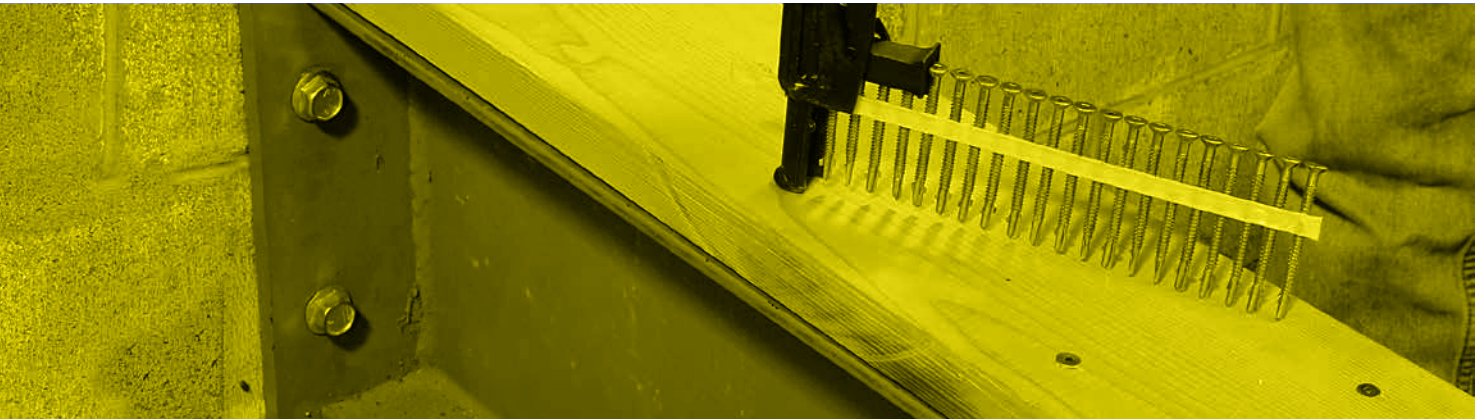

The TB Timber-to-steel screw is a heavy duty 14 gauge fastener designed for timber to steel connection. The wing design creates a clearance hole in the timber resulting in no sheet ride.

### Features

- Flat head with nibs for easy countersinking
- #3 square drive (driver bit included in box)
- #4 drill point with wings

### Application

- Timber to hot-rolled steel
- Maximum recommended board thickness:  
45 mm screw — 20 mm; 60 mm screw — 30 mm;  
75 mm screw — 50 mm
- Recommended steel thickness 1.2–8 mm

### Finish

- Class 3 Galvanised



**Flat head with nibs**  
for easy countersinking



**Wing design** to create  
clearance hole means  
no sheet ride

Collated Screws for the Quik Drive® System

## 14 Gauge Timber-to-Steel Screw

Bit(s) included with every box of screws

Model No.	Diameter	Length	Thread	Point	Box Qty	Drive Size	Replacement Bit	HSD60	HSD75
TBG1445SA	6.2mm	45mm	14 TPI	#4 Drill	1000	#3 Undersize Square Drive	BIT3SU-RC10	✓	—
TBG1460SA		60mm			750				✓
TBG1475SA		75mm			—				✓

These coated fasteners possess a level of corrosion resistance that makes them suitable for use in some exterior and corrosive environments and with some preservative-treated timber. For applications in higher-exposure applications, consider Type-300 series stainless-steel fasteners for superior corrosion resistance. See pages 20–26 for additional important information before selecting a fastener for a specific application.