

## IS Insulation Supports

IS24 insulation supports are cut from specialty wire for optimal flexibility and strength. Support ends secure into the timber allowing the insulation to be installed between joists and rafters.

- Ideal for confined spaces.
- 100 insulation supports covers approximately 21m<sup>2</sup> with 600mm joist spacing.

**Material:** 2mm thick specialty wire.

**Finish:** None. See Corrosion Information.

### Installation


- Follow insulation manufacturer's installation instructions.
- Wear appropriate Personal Protection Equipment (PPE).




IS24

### Typical Installation

**STEP 1:** Start 10cm from end.  
Install one support every 30-40cm.

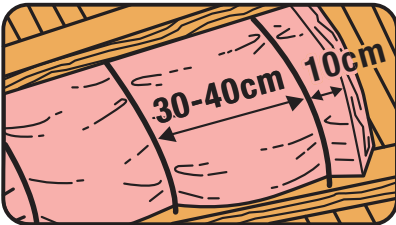

**STEP 2:** Easy one-hand push-in installation holds insulation securely in place. Ends secure into timber for permanent installation.

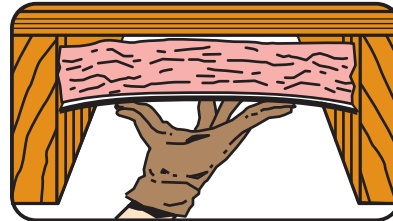

IS24



Typical IS24 installation

### IS Technical Data

Model No.	Dimensions (mm)	
	W	L
IS24-R100	2	92