


NEW!



Deck-Drive™ DCSD **COMPOSITE** Screw for all types of composite decking to steel

The Deck-Drive™ DCSD **COMPOSITE** screw from Simpson Strong-Tie is designed to work in composite decking without sacrificing performance. The DCSD **COMPOSITE** screw provides a cleaner, less noticeable installed appearance due to the special head design and is available in 4 colours, matched to blend with most composite deck products.

Features:

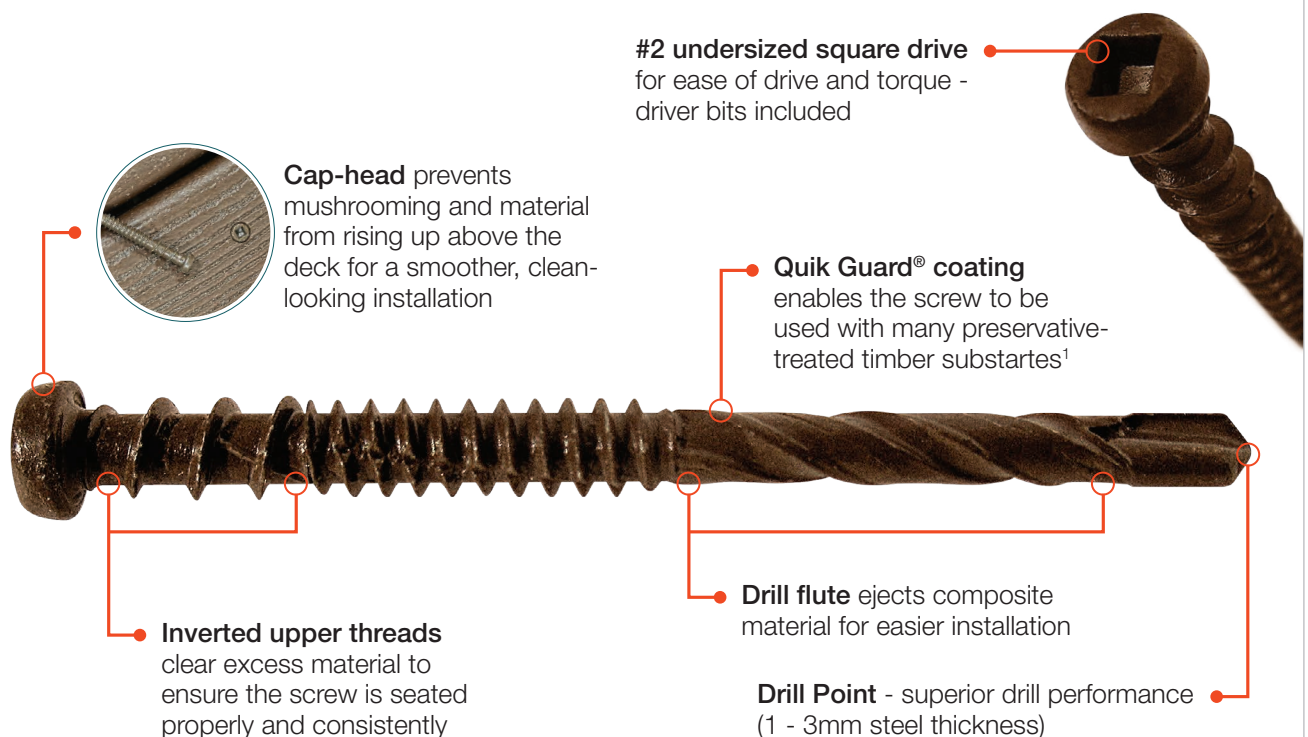

Collated for Quik Drive® Systems

| Model No. | Size | Diameter (mm) | Length (mm) | Thread | Point | Finish | Colour | Ctn Qty | SDS* PR0250 PR0300 |
|--------------|------|---------------|-------------|--------|----------------|-------------|--------|---------|--------------------------|
| DCSD238SBR01 | #10 | 4.9 | 60 | 16 TPI | #3 Drill Point | Quik Guard® | Brown | 1000 | ✓ |
| DCSD238SGR01 | #10 | 4.9 | 60 | 16 TPI | #3 Drill Point | Quik Guard® | Grey | 1000 | ✓ |
| DCSD238SRD01 | #10 | 4.9 | 60 | 16 TPI | #3 Drill Point | Quik Guard® | Red | 1000 | ✓ |
| DCSD238STN01 | #10 | 4.9 | 60 | 16 TPI | #3 Drill Point | Quik Guard® | Tan | 1000 | ✓ |

#2 undersized square drive (replacement driver bit - BIT2SU)

*SDS tool requires 2.5" (65mm) nose piece NPA25G2

¹Quik Guard coating recognized for use in ACQ treated wood (See [strongtie.com/info](http://www.strongtie.com/info) for more information).
Approved fastener (by Trex®) for Trex® Elevations™.

This flier is effective until October 31, 2016, and reflects information available as of November 1, 2014. This information is updated periodically and should not be relied upon after October 31, 2016; contact Simpson Strong-Tie for current information and limited warranty or see www.strongtie.com.au/info
© 2014 Simpson Strong-Tie Company Inc.

F-F-DCSD14AU 11/14 exp. 10/16

02 9831 7700
www.strongtie.com.au