


ANCHOR TENSION LOADS IN MASONRY CHAIR BLOCK

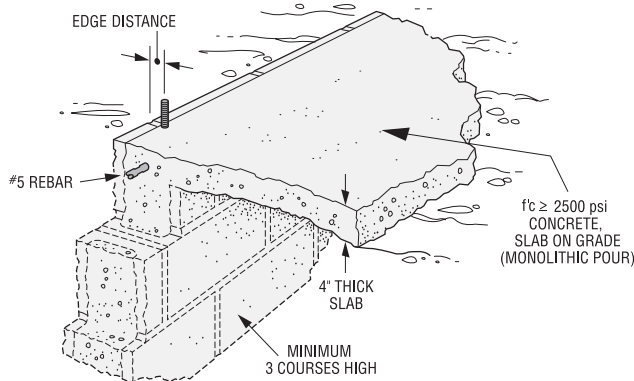

Tension loads have been established for the SET Epoxy-Tie[®], AT Acrylic-Tie[®] adhesive and the Titen HD[®] anchor in a chair block application at minimum edge distance. 2500 psi concrete is used to grout the cells of the block and pour the slab.

Tension Loads for Threaded Rod Anchors with AT or SET in 8-inch CMU Chair Blocks filled with Normal-Weight Concrete

Rod Dia. in. (mm.)	Drill Bit Dia. in.		Embed. Depth in. (mm.)	Minimum Edge Dist. in. (mm.)	Critical Spacing in. (mm.)	Allowable Tension Load Based on CMU Strength lbs. (kN)				Allowable Tension Load Based on Steel Strength lbs. (kN)
	SET	AT				SET		AT		
						Ultimate	Allowable	Ultimate	Allowable	
1/2 (12.7)	5/8	9/16	4 1/2 (114)	1 3/4 (44.5)	18 (457)	4,810 (21.4)	1,200 (5.3)	3,540 (15.7)	885 (3.9)	3,750 (16.7)
			7 (178)	1 3/4 (44.5)	28 (711)	7,715 (34.3)	1,930 (8.6)	6,285 (28.0)	1,570 (7.0)	
			12 (305)	1 3/4 (44.5)	48 (1220)	—	—	18,950 (84.3)	4,740 (21.1)	
5/8 (15.9)	3/4	1 1/16	4 1/2 (114)	1 3/4 (44.5)	18 (457)	4,955 (22.0)	1,240 (5.5)	4,775 (21.2)	1,195 (5.3)	5,875 (26.1)
			7 (178)	1 3/4 (44.5)	28 (711)	7,600 (33.8)	1,900 (8.5)	7,960 (35.4)	1,990 (8.9)	
			12 (305)	1 3/4 (44.5)	48 (1219)	12,220 (54.4)	3,055 (13.6)	—	4,250 (18.9)	
			15 (381)	1 3/4 (44.5)	60 (1524)	—	—	22,425 (99.8)	5,605 (24.9)	

1. Allowable load must be the lesser of the CMU or steel strength.
2. Allowable bond strength is based on a factor of safety of 4.0.
3. Threaded rod anchors shall be ASTM A307 strength minimum.
4. Center #5 rebar in CMU cell and concrete slab.
5. CMU shall conform to ASTM C90, Grade N, Type II and may be medium-weight or normal-weight.
6. Concrete fill shall have a minimum compressive strength of $f'c = 2,500$ psi and be poured monolithically with the floor slab.
7. Refer to the current Simpson Strong-Tie Anchor Systems[®] catalog for additional product information including temperature sensitivity load reductions and guidance on oversized holes.

Tension Loads for Titen HD in 8-inch CMU Chair Blocks filled with Normal-Weight Concrete

Size in. (mm)	Drill Bit Dia. in.	Embed. Depth in. (mm)	Min. Edge Dist. in. (mm)	Critical Spacing Dist. in. (mm)	Allowable Tension Load Based on CMU Strength	
					Ultimate lbs. (kN)	Allow. lbs. (kN)
3/8 (9.5)	3/8	2 3/8 (60)	1 3/4 (44)	9 1/2 (241)	3,175 (14.1)	795 (3.5)
		3 3/8 (86)	1 3/4 (44)	13 1/2 (343)	5,175 (23.0)	1,295 (5.8)
		5 (127)	2 1/4 (57)	20 (508)	10,584 (47.1)	2,645 (11.8)
1/2 (12.7)	1/2	8 (203)	2 1/4 (57)	32 (813)	13,722 (61.0)	3,430 (15.3)
		10 (254)	2 1/4 (57)	40 (1016)	16,630 (74.0)	4,160 (18.5)
5/8 (15.9)	5/8	5 1/2 (140)	1 3/4 (44)	22 (559)	9,025 (40.1)	2,255 (10.0)
		12 (305)	2 1/4 (57)	48 (1219)	18,104 (80.5)	4,525 (20.1)

1. The allowable loads are based on a factor of 4.0.
2. CMU shall conform to ASTM C90, Grade N, Type II and may be medium-weight or normal-weight.
3. Concrete fill shall have a minimum compressive strength of $f'c = 2,500$ psi and be poured monolithically with the floor slab.
4. Center #5 bar in CMU cell and concrete slab.
5. Refer to current Simpson Strong-Tie Anchor Systems catalog for additional product information.

This bulletin is effective until June 30, 2010, and reflects information available as of June 1, 2008. This information is updated periodically and should not be relied upon after June 30, 2010; contact Simpson Strong-Tie for current information and limited warranty or see www.strongtie.com.

Home Office
5956 W. Las Positas Blvd.
Pleasanton, CA 94588
FAX: 925/847-1603

Southwest U.S.A.
260 N. Palm Street
Brea, CA 92821
FAX: 714/871-9167

Southeast U.S.A.
2221 Country Lane
McKinney, TX 75069
FAX: 972/542-5379

Western Canada
11476 Kingston St.
Maple Ridge, BC V2X 0Y5
FAX: 604/465-0297

Northwest U.S.A.
5151 S. Airport Way
Stockton, CA 95206
FAX: 209/234-3868

Northeast U.S.A.
2600 International Street
Columbus, OH 43228
FAX: 614/876-0636

Eastern Canada
5 Kenview Blvd.
Brampton, ON L6T 5G5
FAX: 905/458-7274

Warehouses & Manufacturing:
Eagan, MN; Enfield, CT; Gallatin, TN;
High Point, NC; Jacksonville, FL; Jessup, MD;
Kent, WA; Langley, BC; Ontario, CA

800-999-5099
www.strongtie.com

© 2008 Simpson Strong-Tie Company Inc.
Printed in the U.S.A.

T-SAS-CHRLK08 6/08 exp. 6/10